

# Namens- verwaltung


## Namen und Namensverwaltung

*Namen sind Schall und Rauch*

*Nomen est omen*

- *Namen* sind Symbole, die typischerweise durch Zeichenketten repräsentiert werden
  - benutzerorientierte Namen haben im Unterschied zu Adressen (oder maschinenorientierten Namen) i.a. keine feste Länge
- Dienen der (eindeutigen) *Bezeichnung von Objekten*

- daher oft auch “Bezeichner”
- es gibt auch *anonyme* Objekte (z.B. dynamische Variablen, die mit “new” erzeugt werden)
- ein Objekt kann u.U. mehrere Namen haben (“*alias*”)
- innerhalb eines *Kontextes* sollte ein Name *eindeutig* sein
- Benutzer soll ein Objekt einfach *umbenennen* können
- gleicher Name kann zu *verschiedenen Zeiten* unterschiedliche Objekte bezeichnen

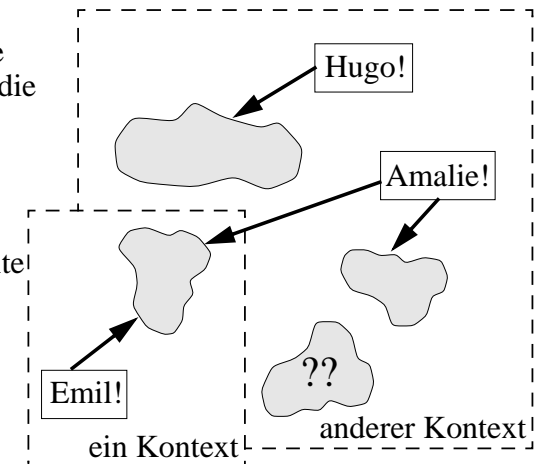

- Beispiele für bezeichnete Objekte
  - in Programmiersprachen:  
Variablen, Prozeduren, Datentypen, Konstanten...
  - in verteilten Systemen:  
Dienste, Server, Maschinen, Benutzer, Dateien, Betriebsmittel...

# Zweck von Namen

Typ, Gestalt, Zweck...

## - Geben Aufschluss über die Art eines Objektes

- falls Name (für Benutzer) sinnvoll gewählt
- z.B. Konventionen xyz.c, xyz.o, xyz.ps oder "printer"

## - Dienen der *Identifizierung* von Objekten

- daher oft auch "Identifikator" für "Name"
- Sprechweise oft: "Objekt A" statt "das mit 'A' bezeichnete Objekt"

## - Ermöglichen die *Lokalisierung* von Objekten

- zwecks Manipulation der Objekte
- über den Namen besteht eine Zugriffsmöglichkeit auf das Objekt selbst
- Namen selbst sind aber oft unabhängig von der Objektlokation
- besondere Herausforderung: Lokalisieren von *mobilen* Objekten

## - Sind URLs Namen?

- oder eher Adressen?
- [www.fuzzycomp.eu/Studium/bewerbung.html](http://www.fuzzycomp.eu/Studium/bewerbung.html)
- [121.73.129.200/Studium/bewerbung.html](http://121.73.129.200/Studium/bewerbung.html)

# Namen und Adressen

## - Jedes Objekt hat eine Adresse

- Speicherplatzadressen
- Internetadressen
- Ethernetadressen
- Port-Nummer bei TCP
- ...

## - Adressen sind "physische" Namen

Namen der untersten Stufe

## - Adressen ermöglichen die *direkte Lokalisierung* eines Objektes

## - Adressen sind ebenfalls innerhalb eines Kontextes ("Adressraum") eindeutig

## - Adresse eines Objektes ist u.U. *zeitabhängig*

- mobile Objekte
- "relocatable"

## - *Dagegen*: Name eines Objektes ändert sich i.a. nicht

- vielleicht aber bei Heirat, Zuweisung eines Alias...!

## - Entkoppelung von Namen und Adressen unterstützt die *Ortstransparenz*

## - Zuordnung Name --> Adresse nötig

- vgl. persönliches Adressbuch
- "Binden" eines Namens an eine Adresse

# Binden

- Binden = Zuordnung Name --> Adresse
  - konzeptuell daher auch: Name --> Objekt
  - Namen, die bereits Ortsinformationen enthalten: "impure names"

## - Binden bei Programmiersprachen:

- Beim Übersetzen / Assemblieren
  - > "relative" Adresse
- Durch Binder ("linker") oder Lader
  - > "absolute" Adresse
- Ggf. Indirektion durch das Laufzeitsystem
  - z.B. bei Polymorphie objektorientierter Systeme

## - Binden von Dienstaufrufen bei klassischen Systemen

- Dienstaufwurf durch Trap / Supervisor-Call ("SVC")
  - Name = SVC-Nummer (oder "symbolische" Bezeichnung)
- Bei *Systemstart* wird eine Verweistabelle angelegt
  - "SVC table", "switch vector"
- Dienstadresse ändert sich bis zum reboot nicht


## - Binden in verteilten / offenen Systemen

- Dienste entstehen dynamisch, werden ggf. verlagert
  - haben ggf. unterschiedliche Lebenszyklen und -dauer
- Binden muss daher ebenfalls *dynamisch* ("zur Laufzeit" bzw. beim Objektzugriff) erfolgen!

# Namenskontext


Namensraum

- Namen werden relativ zu einem *Kontext* interpretiert
  - "relative Namen" (gleiche Namen in verschiedenen Kontexten möglich)
  - *Interpretation* = Abbildung auf die gebundene Adresse oder einen Namen niedrigerer Stufe
  - Interpretation erfolgt oft mehrstufig, z.B.: Dateiname --> Adresse des Kontrollblocks --> Spur / Sektor auf einer Platte
- Namen sollen innerhalb eines Kontextes eindeutig sein
  - bzw. durch zusätzliche Attribute eindeutig identifizierbar sein
- Falls nur ein einziger Kontext existiert:  
*flacher Namensraum* (aus "absoluten Namen")
  - Partition des Namensraum wird als "Domäne" bezeichnet
- Namenskontexte sind (i.a. abstrakte) Objekte, die selbst wieder einen Namen haben können
  - z.B. benannte Dateiverzeichnisse ("directory")
  - übergeordneter Kontext --> *Hierarchie*

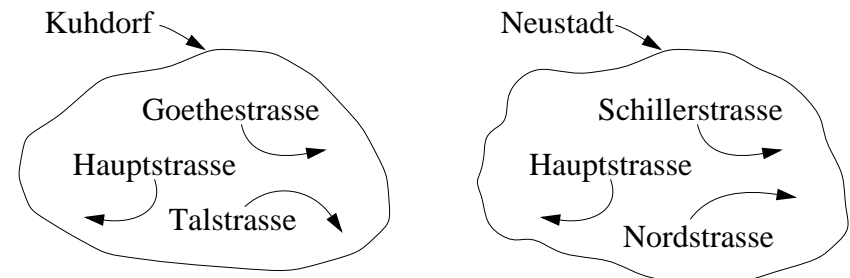

# Hierarchische Namensräume

- Baumförmige Struktur von Namenskontexten

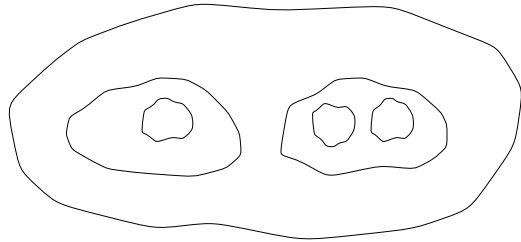

## - Beispiel: Adressen im Briefverkehr

- "Hans Meier, Deutschland" genügt nicht...


Sind das nicht eher Adressräume als Namensräume?

## - Beispiel: Telefonsystem

- Landeskennung
- Ortsnetzkennung
- Teilnehmerkennung

32168 ist ein relativer Name, der z.B. im Kontext 08977 interpretiert werden muss

## - Beispiel: UNIX-Dateisystem

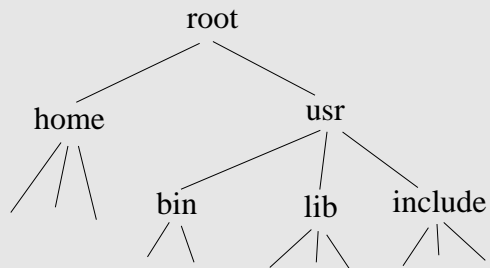

# Hierarchische Namensräume (2)

- Eignen sich gut für verteilte Systeme

- besser als flache Namensräume
- leichter skalierbar (z.B. zur Gewährleistung der Eindeutigkeit)
- dezentrale Verwaltung der Kontexte durch eigenständige Autoritäten, die wieder anderen Autoritäten untergeordnet sind
- Namensinterpretation stufenweise durch verteilte Instanzen
- erleichtert Systemrekonfiguration
- eindeutige absolute Namen durch Angabe des ganzen Pfades

## - Strukturierte Namen

- bestehen aus mehreren Komponenten
- Komponenten bezeichnen typischerweise Kontexte
- Bsp: root/usr/bin
- Bsp: Meier.Talweg 2.Kuhdorf.Oberpfalz.Deutschland
- Bsp: +49 08977 32168 (präfixfreier Code!)
- oft geographisch oder thematisch gegliedert

---

## - *Synonyme Namen* bezeichnen das gleiche Objekt

- Bsp: der relative Name 'c' im Kontext 'a' bezeichnet das gleiche Objekt wie der absolute Name 'a.c'

## - *Alias-Namen*: Synonyme im gleichen Kontext

# Namensverwaltung (“name service”)

- Verwaltung der Zuordnung Name --> Adresse
  - Eintragen: “bind (Name, Adresse)” sowie Ändern, Löschen etc.
  - Eindeutigkeit von Namen garantieren
  - Zusätzlich ggf. Verwaltung von Attributen der bezeichneten Objekte
- Auskünfte (“Finden” von Ressourcen)
  - z.B. Adresse zu einem Namen (“resolve”: Namensauflösung)
  - z.B. alle Dienste mit gewissen Attributen (etwa: alle Postscript-Drucker) “yellow pages” <--> “white pages”
- Ggf. Schutz- und Sicherheitsaspekte
  - Capability-Listen, Schutzbits, Autorisierungen...
  - Dienst selbst soll hochverfügbar und sicher (z.B. bzgl. Authentizität) sein
- Ggf. Generierung eindeutiger Namen
  - UUID (Universal Unique Identifier)
  - innerhalb eines Kontextes (z.B. mit Zeitstempel oder lfd. Nummer)
  - bzw. global eindeutig (z.B. eindeutigen Kontextnamen als Präfix vor knotenlokale laufende Nummer; ggf. auch lange Zufallsbitfolge)

---

## Vgl. “klassische” Dienste beim Telefonsystem:

- Telefonbuch } Abbildung Name --> Telefonnummer
- Auskunft }
- ggf. mehrstufig / dezentral: Auslandsauskunft wendet sich an Ortsauskunft im Ausland... (--> hierarchische Namenskontexte notwendig!)
- lokale Telefonbücher sowie Ortsvorwahlverzeichnis sind repliziert
  - sonst Überlastung des zentralen Dienstes
  - Problem der verzögerten Aktualisierung (veraltete Information)
- “gelbe Seiten”: Suche nach Dienst über Attribute

# Zufällige UUIDs? Echter Zufall?

[http://webnz.com/robert/true\\_rng.html](http://webnz.com/robert/true_rng.html)

The usual method is to amplify *noise* generated by a *resistor* (Johnson noise) or a semi-conductor *diode* and feed this to a comparator or Schmitt trigger. If you sample the output (not too quickly) you (hope to) get a series of bits which are statistically independent.

[www.random.org](http://www.random.org)

Random.org offers *true random numbers* to anyone on the *Internet*.

At this time, there are two ways to obtain the random numbers: via the *World Wide Web* and via the *CORBA* server.

Computer engineers chose to introduce randomness into computers in the form of *pseudo-random number generators*. As the name suggests, pseudo-random numbers are not truly random. Rather, they are computed from a mathematical formula or simply taken from a precalculated list.

Random numbers are used for computer games but they are also used on a more serious scale for the generation of cryptographic keys and for some classes of scientific experiments. For *scientific experiments*, it is convenient that a series of random numbers can be replayed for use in several experiments, and pseudo-random numbers are well suited for this purpose. For *cryptographic use*, however, it is important that the numbers used to generate keys are not just seemingly random; they must be truly *unpredictable*.

The way the random.org random number generator works is quite simple. A radio is tuned into a frequency where nobody is broadcasting. The *atmospheric noise* picked up by the receiver is fed into a Sun SPARC workstation through the microphone port where it is sampled by a program as an eight bit mono signal at a frequency of 8KHz. The upper seven bits of each sample are discarded immediately and the remaining bits are gathered and turned into a stream of bits with a high content of entropy. *Skew correction* is performed on the bit stream, in order to insure that there is an approximately even distribution of 0s and 1s.

The skew correction algorithm used is based on transition mapping. Bits are read two at a time, and if there is a *transition between values* (the bits are 01 or 10) one of them - say the first - is passed on as random. If there is no transition (the bits are 00 or 11), the bits are discarded and the next two are read. This simple algorithm was originally due to *Von Neumann* and completely eliminates any bias towards 0 or 1 in the data. [ *Why??* ]

# Web Interface to True Random Numbers

<http://www.random.org/nform.html>

Smallest value 1, largest value 100, format in 5 columns:

37	36	10	44	94
79	12	61	43	100
63	37	27	30	30
41	96	57	19	83

## Flip a Coin

<http://www.random.org/flip.html>

Some physical coins have a greater tendency towards heads or tails. The euro coins in particular seem to fall heads up more often.



# A Kr85-based Random Generator

<http://www.fourmilab.ch/hotbits/> ...by John Walker

The *Krypton-85* nucleus (the 85 means there are a total of 85 protons and neutrons in the atom) spontaneously turns into a nucleus of the element *Rubidium* which still has a sum of 85 protons and neutrons, and a *beta particle (electron) flies out*, resulting in no net difference in charge. What's interesting, and ultimately useful in our quest for random numbers, is that even though we're absolutely certain that if we start out with, say, 100 million atoms of Krypton-85, 10.73 years later we'll have about 50 million, 10.73 years after that 25 million, and so on, there is *no way even in principle* to predict when a given atom of Krypton-85 will decay into Rubidium.

So, given a Krypton-85 nucleus, there is *no way whatsoever to predict when it will decay*. If we have a large number of them, we can be confident half will decay in 10.73 years; but if we have a single atom, pinned in a laser ion trap, all we can say is that there's even odds it will decay sometime in the next 10.73 years, but as to precisely when we're fundamentally quantum clueless. The only way to know when a given Krypton-85 nucleus decays is after the fact--by detecting the ejecta.

This *inherent randomness* in decay time has profound implications, which we will now exploit to generate random numbers. For if there's no way to know when a given Krypton-85 nucleus will decay then, given an collection of them, there's no way to know when the next one of them will shoot its electron bolt.

Since the time of any given decay is random, then *the interval between two consecutive decays is also random*. What we do, then, is measure a pair of these intervals, and *emit a zero or one bit based on the relative length of the two intervals*. If we measure the same interval for the two decays, we discard the measurement and try again, to avoid the risk of inducing bias due to the resolution of our clock.

To create each random bit, we wait until the first count occurs, then measure the time, T1, until the next. We then wait for a third pulse and measure T2, yielding a pair of durations... if *T1 is less than T2* we emit a *zero* bit; if *T1 is greater* than T2, a *one* bit. In practice, to avoid any residual bias resulting from non-random systematic errors in the apparatus or measuring process consistently favouring one state, the sense of the comparison between T1 and T2 is reversed for consecutive bits.



For example, you might worry about the fact that the intensity of the radiation source is *slowly decreasing over time*. Krypton-85's *10.73 year half-life* isn't all that long. One half-life in the future, we'll measure T1 and T2 intervals, on the average, *twice as long as today*. This means, then, that even on consecutive measurements there is a small bias in favour of T2 being longer than T1. How serious is this?

...this means T2 will be, on average,  $10^{-14}$  seconds longer than T1. The crystal oscillator which provides the time base for the computer making the measurement is only *accurate* to 100 parts per million, or *one part in ten thousand*, and thus can induce errors ten million times as large as those due to the slow decay of the source. (This is, again, unlikely to be a real problem because most computer clocks, while prone to drifting as temperature and supply voltage vary, do not change significantly on the millisecond scale. Still, *jitter due to where the clock generator happens to trigger on the oscillator waveform* will still dwarf the effects of decay of the source during one measurement.)

You request HotBits by filling out and transmitting a *request form*, which is sent by your *World-Wide Web browser* in HTTP to our Web server, [www.fourmilab.ch](http://www.fourmilab.ch). Your request form is processed by a CGI program written in Perl which, after validating the request, forwards it in HTTP format to a dedicated HotBits server machine which is connected to the HotBits generation hardware via the COM1 port.

To provide better response, the dedicated HotBits server machine *maintains an inventory* of two million (256 kilobytes) random bits, and services requests from this inventory whenever possible.

To detect radioactive decay events, I use a commercial radiation monitor which contains a *Geiger-Müller tube detector*.

Radiation is ubiquitous in our fair universe... Although *background radiation* can be used, you either have to not need very many random bits or else be very patient, since background radiation counts only occur every few seconds. To crank up the bit generation rate to something usable for a server accessible on the Internet, we need a *radiation source* more intense than background radiation.

... a 60 microcurie Jordan Nuclear *Krypton-85 source capsule*, model BB-0005. The capsule is about two centimetres long, and has a foil window on the left side through which the radiation emerges. A better choice would be a 10 microcurie *Cesium-137* check source. In most locations, no license is required to obtain such a check source, which can be *ordered through the mail* from dealers in such gadgets.

Another alternative is to visit a *shop catering to rock collectors* and buy a specimen of a *Uranium-bearing ore* such as Carnotite or Pitchblende.



The generator doesn't have to be anywhere near the computer. In fact, it's located three floors down in a converted 70,000 litre subterranean water cistern with metre-thick concrete walls... No need to worry about stray radiation zipping around the computer room!

### The randomX package for Java

<http://www.fourmilab.ch/hotbits/source/randomX/randomX.html>

*Class randomX.randomHotBits*

```
// Implementation of a randomX-compliant class which obtains genuine
// random data from John Walker's HotBits radioactive decay random
// sequence generator.
```

```
public byte nextByte()
```

```
// Get next byte from generator.
```

<http://www.fourmilab.ch/hotbits/generate.html>

The following hexadecimal data are the *random bytes you requested*:

```
AFBD9001692FE32805C8AAB7D49BA069D1F641987ED8C28865B2FCF23A9B91DF
927F52E4083CCC73C1E3200C806F5B31D954117ADCAD7B6A0CA7814B1540CE60
065F62E8FB0018F04C86159085E46465987633135232D060E4A255BABAE26D68
```